




SURFACE PREWIRED • LED





**SURFACE PREWIRED  
KTX/N**

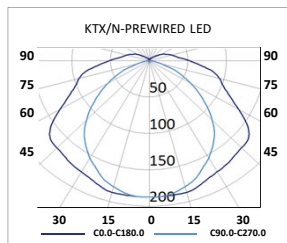

KTX/N

<b>Mounting</b>	Surface.
<b>Lamps</b>	
<b>Optical system</b>	Prismatic diffuser.
<b>Light distribution</b>	Direct.
<b>Wiring</b>	Electronic control gear (EEI=A2). PF>0,95
<b>Material</b>	Body: Cold-rolled steel and lacquered in white epoxy-polyester by the continuous lacquering system with minimum thicknesses of 0.6mm according to the specifications of the ECCA and ENEC-10 and VDE standards. Diffuser: Methyl prismatic methacrylate.
<b>Surface finish</b>	White colour RAL 9003.

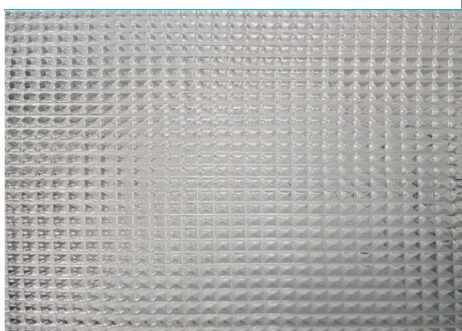

	X	L	S
<b>2x1200</b>	150	1255	1040
<b>2x1500</b>	150	1535	1320



CODE	REFERENCE	Kg.	Lamp	Lampholder	Specifications
H302202365	<b>KTX/N-2x1200 PREWIRED LED</b>	(2,7)	-	G13	Methyl methacrylate prismatic diffuser.
H302202585	<b>KTX/N-2x1500 PREWIRED LED</b>	(3,1)	-	G13	Methyl methacrylate prismatic diffuser.

more information in [www.lux-may.com](http://www.lux-may.com)

LUX-MAY reserves the right to change product characteristics without notice.