






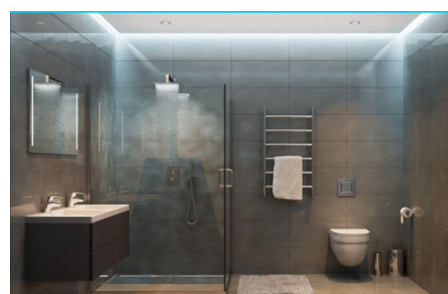

SURFACE BATTENS • LED




BATTENS LED ANG/OP



Mounting	Surface, for continuous or independent lines.
Light source	LED modules SMD  ELT.
Optical system	Opal diffuser optic, transparent and wide lens 60°.
Light distribution	Direct.
Wiring	Electronic control gear (EEI=A+). PF>0,95 Possibility of incorporating dimmable electronic control gear (DALI). Maximum length of continuous lines (8m) powered by the same driver.
Material	Body: Standard aluminum profile with 20 mm section for installation on the surface. Fixing: Direct (screwed or stuck). Accessories included (covers, flexible mounting plates, joint plates).
Surface finish	Body: Aluminum anodized colour, black anodized or white.
Accessories	Covers: The thickness of the end cap increases the length of the profile (2.3mm). Grey, black, white and silver colours. Flexible mounting plates: Fixation by click on surface installation. Easy to install. Joint plates: Plates to assemble and join two profiles. Fixation by clicking on surface installation. Cable to driver included up to 2mts.



Profile surface finish



Anodized aluminum



Anodized black



White



Diffusers



OPAL


60°

OPAL

TRANSPARENT

60°

Mounting



Covers



Flexible mounting plates



Joint plates



AVAILABLE



CODE	REFERENCE	Light output	Power	Efficiency	Colour temperature	Colour rendering index	Optic 60°	DIMM DALI	Length L
ANG10600D	ANG/OP-6W/m-600lm/m 840	600	6	100	4000	>80	✓	✓	1000
ANG101K2D	ANG/OP-12W/m-1200lm/m 840	1200	12	100	4000	>80	✓	✓	1000
ANG101K5D	ANG/OP-17W/m-1500lm/m 840	1500	17	88	4000	>80	✓	✓	1000

Under request, colour temperature 2200K-6500K and/or other profile length.

more information in www.lux-may.com

LUX-MAY reserves the right to change product characteristics without notice.