






SURFACE BATTENS IP65 • LED

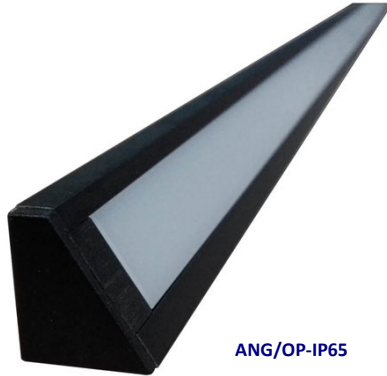

**BATTENS LED
ANG/OP-IP65**




ANG/OP-IP65



Mounting	Surface, for continuous or independent lines.
Light source	LED modules SMD ELT.
Optical system	Opal diffuser optic and transparent.
Light distribution	Direct.
Wiring	Electronic control gear (EEI=A+). PF>0,95 Possibility of incorporating dimmable electronic control gear (DALI). Maximum length of continuous lines (8m) powered by the same driver.
Material	Body: Standard aluminum profile with 20 mm section for installation on the surface. Fixing: Direct (screwed or stuck). Optional accessories (covers, flexible mounting plates, joint plates).
Surface finish	Body: Aluminum anodized colour, black anodized or white.
Accessories	Covers: The thickness of the end cap increases the length of the profile (2.3mm). Grey, black, white and silver colours. Flexible mounting plates: Fixation by click on surface installation. Easy to install. Joint plates: Plates to assemble and join two profiles. Fixation by clicking on surface installation. Cable to driver included up to 2mts.



Profile surface finish



Anodized aluminum



Anodized black




White





OPAL



OPAL



TRANSPARENT

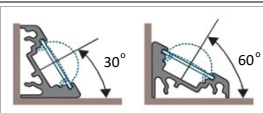


Mounting



Covers



Flexible mounting plates



AVAILABLE



CODE	REFERENCE	Light output lm/m	Power W/m	Efficiency lm/W	Colour temperature CCT (K)	Colour rendering index CRI (Ra)	DIMM DALI	Length L mm
ANP10600D	ANG/OP-IP65-6W/m-600lm/m 840	600	6	100	4000	>80	✓	1000
ANP101K2D	ANG/OP-IP65-12W/m-1200lm/m 840	1200	12	100	4000	>80	✓	1000
ANP101K5D	ANG/OP-IP65-17W/m-1500lm/m 840	1500	17	88	4000	>80	✓	1000

Under request, colour temperature 2200K-6500K and/or other profile length.

more information in www.lux-may.com

LUX-MAY reserves the right to change product characteristics without notice.