

CENSER 100

ES

Montaje: Adosado / Suspendido.

Fuente de luz: Módulos compactos LED COB Tridonic.
Temperatura de color 4000K. Disponible, 3000K.

Sistema óptico: Reflector.

Distribución luminosa: Directa. Estándar 24°. Disponible 16°, 38°.

Equipo eléctrico: Equipo de control electrónico. PF>0,95.
Disponible, regulable DALI.

Materiales: Cuerpo: Aluminio extruido lacado en blanco. Reflector: Aluminio anodizado brillante. Cierre: Cristal transparente. Suspensión de cable 2 m.

Acabado: Cuerpo color blanco RAL 9003 (estándar). Opcional gris RAL 9006, negro RAL 9005.



EN

Mounting: Surface / Suspended.

Light source: LED compact modules COB Tridonic.
Temperature color 4000K. Available, 3000K.

Optical system: Reflector.

Light distribution: Direct. Standard 24°. Available 16°, 38°.

Electrical equipment: Electronic control gear. PF>0,95.
Available, dimmable DALI.


Materials: Body: Aluminum extruded lacquered in white. Reflector: Bright anodized aluminum. Cover: Transparent glass. Wire length 2 m.

Surface finish: Body white color RAL 9003 (standard). Optional grey RAL 9006, black RAL 9005.




ESTANDAR | STANDARD


CENSER-100-24°-14W



CENSER-100-16°-14W



CENSER-100-38°-14W




ESTANDAR COLOR BLANCO
STANDARD WHITE COLOR


ADOSABLE/SURFACE



CENSER/S

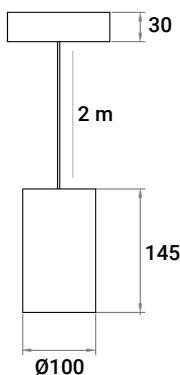

ESTANDAR/STANDARD



CONFIGURACION ONLINE ONLINE CONFIGURATION



Código Code	Referencia Reference	Kg Kg	Potencia Power	Lúmenes Lumens	Eficiencia Efficiency	CCT (K) CCT (K)
CEN112K2B	CENSER-100-24°-14W 2215lm/840	1,0	14W	2215	158 lm/W	4000
CEN113K1B	CENSER-100-24°-20W 3160lm/840	1,0	20W	3160	158 lm/W	4000
CES112K2B	CENSER/S-100-24°-14W 2215lm/840	0,9	14W	2215	158 lm/W	4000
CES113K1B	CENSER/S-100-24°-20W 3160lm/840	0,9	20W	3160	158 lm/W	4000

ACCESORIOS DISPONIBLES/AVAILABLE ACCESSORIES

REGULACION/DIMMING DALI T.COLOR 3000K OPTICA/LENS 16°, 38°