

RTK

ES

Montaje: Carril adosado/Suspendido.

Lámparas: Módulos LED SMD.

Sistema óptico: Óptica.

Distribución luminosa: Directa. Óptica de 90°.

Disponibles ópticas de 30°, ASYM, DASYM.

Equipo eléctrico: Equipo de control electrónico TRIDONIC. PF>0,95. Disponible, regulable 1-10V o DALI y/o kit de emergencia (1-3 h.).

Materiales: Cuerpo: Acero de alta resistencia a la torsión y espesores mínimos garantizados de 0,6mm, según Normas ENEC-10 y VDE. Óptica: Material termoplástico PMMA.

Acabado: Color blanco.



EN

Mounting: Surface/Suspended track.

Light source: LED modules SMD.

Optical system: Lense.

Light distribution: Direct. Available lenses of 30°, ASYM, DASYM.

Electrical equipment: Electronic control gear TRIDONIC. PF>0,95. Available, dimmable 1-10V or DALI and/or emergency Kit (1-3 h.).


Materials: Body: Steel sheet with high torsion resistance and minimum guaranteed thickness of 0,6mm, according to Normas ENEC-10 and VDE standards. Optic: Thermoplastic material PMMA..

Surface finish: White color.




ESTANDAR | STANDARD


RTK/90°-1500-115W




RTK/30°-1500-115W



RTK/DASYM-1500-115W




RTK/ASYM (I)-1500-115W



IZQUIERDA/LEFT

RTK/ASYM (D)-1500-115W



DERECHA/RIGHT



RTK/90°



FLICKER
FREE



RTK/30°



RTK/ASYM



RTK/DASYM



SUSPENSION



SUSPENSION



TAPA FINAL/LAST COVER

CARRIL RTK/RTK TRACK



UNION CARRIL/TRACK JOINT



SOPORTE DE LUMINARIA/LUMINAIRE SUPPORT





TAPA CIEGA/COVER



MODULOS LED/LED MODULES



LENTES/LENSES





UNION L/L JOINT






UNION T/T JOINT



UNION X/X JOINT

MONTAJE/MOUNTING

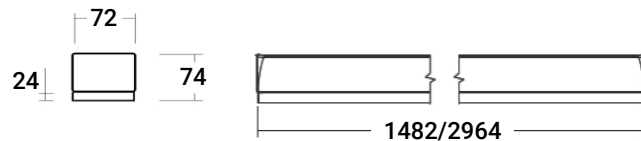

ESTANDAR/STANDARD



DISPONIBLE/AVAILABLE



CONFIGURACION ONLINE
ONLINE CONFIGURATION



Código Code	Referencia Reference	Kg Kg	Potencia Power	Lúmenes Lumens	Eficiencia Efficiency	CCT (K)
RTK416K4B	RTK /90°-1500-42W 7000lm/840	2,6	42W	7000	167 lm/W	4000
RTK418K6B	RTK /90°-1500 60W 9500lm/840	2,6	60W	9500	158 lm/W	4000
RTK4111KB	RTK /90°-1500 80W 11800lm/840	2,6	80W	11800	148 lm/W	4000
RTK4115KB	RTK /90°-1500 91W 15400lm/840	2,6	91W	15400	169 lm/W	4000
RTK4125KB	RTK /90°-1500 115W 25700lm/840	2,6	115W	25700	223 lm/W	4000

Código Code	Referencia Reference	Código Code	Referencia Reference
RTK4C500B	CARRIL/TRACK ELE. RTK 1482 mm 5 POLOS/5 PINES	RTK000002	UNION CARRIL/TRACK JOINT RTK
RTK00000071	CARRIL/TRACK ELE. RTK 1482 mm 7 POLOS/7 PINES	RTK00000L50	UNION/JOINT RTK L 5 POLOS/5 PINES
RTK5C500B	CARRIL/TRACK ELE. RTK 2964 mm 5 POLOS/5 PINES	RTK00000L70	UNION/JOINT RTK L 7 POLOS/7 PINES
RTK00000171	CARRIL/TRACK ELE. RTK 2964 mm 7 POLOS/7 PINES	RTK00000T50	UNION/JOINT RTK T 5 POLOS/5 PINES
RTK000004	TAPA CIEGA/COVER RTK 1482 mm	RTK00000T70	UNION/JOINT RTK T 7 POLOS/7 PINES
RTK000001	TAPA FINAL/LAST COVER RTK (2PCS)	RTK00000X50	UNION/JOINT RTK X 5 POLOS/5 PINES
RTK000003	SUSPENSION CARRIL/SUSPENSION TRACK RTK 1,5m	RTK00000X70	UNION/JOINT RTK X 7 POLOS/7 PINES
RTK000005	GARRA ADOSAR/SURFACE BRACKET RTK		

ACCESORIOS DISPONIBLES/AVAILABLE ACCESSORIES

REGULACION/DIMING DALI T.COLOR 3000K KIT DE EMERGENCIA/EMERGENCY KIT 1h | 3h OPTICA/LENS 30°, ASYM, DOUBLE ASYM SET DE SUSPENSION/SUSPENSION SET
REGULADOR DE LUZ + DETECTOR DE PRESENCIA (RLP)/LIGHT SENSOR + PRESENCE DETECTOR (RLP)