

P/OPAL/L IP65

ES

Montaje: Empotrado.

Fuente de luz: Módulos lineales LED SMD.

Temperatura de color seleccionable: 3000K, 4000K, 6000K.

Sistema óptico: Difusor opal.

Distribución luminosa: Directa.

Equipo eléctrico: Equipo de control electrónico Tridonic. PF>0,95.

Disponible, regulable 1-10V o DALI y/o kit de emergencia (1-3 h).

Materiales: Cuerpo: Acero galvanizado lacado en blanco con tratamiento anti-corrosivo según normas ENEC-10 y VDE. Difusor: Opal. Disponible, difusor microprismático.

Acabado: Color blanco RAL 9003.



EN

Mounting: Recessed.

Light source: LED linear modules SMD.

Selectable temperature color: 3000K, 4000K, 6000K.

Optical system: Opal diffuser.

Light distribution: Direct.

Electrical equipment: Tridonic electronic control gear. PF> 0,95.


Available, dimmable 1-10V or DALI and/or emergency kit (1-3 h).

Materials: Body: High resistance steel with guaranteed minimum thickness of 0.6mm, according to ENEC-10 and VDE standards. Diffuser: Opal. Available, microprismatic diffuser.

Surface finish: White color RAL 9003.



P/OPAL/L-IP65-55W

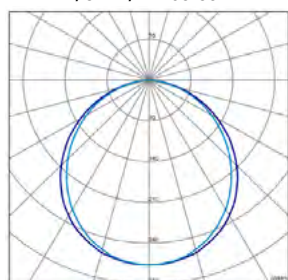

FLICKER
FREE

IP-65



SALAS BLANCAS
CLEAN ROOM

CCT SELECTABLE
TEMPERATURE COLOR



RAPIDA FIJACION AL TECHO
FAST FIXING TO THE CEILING

Incluye junta de goma para un óptimo sellado entre luminaria y techo. Includes rubber gasket for optimal sealing between luminaire and ceiling.

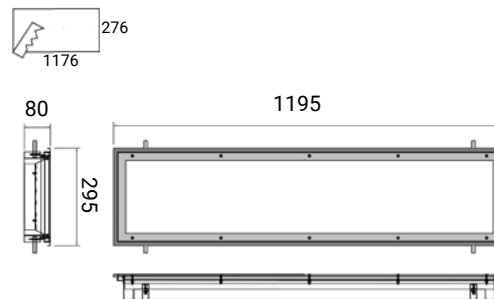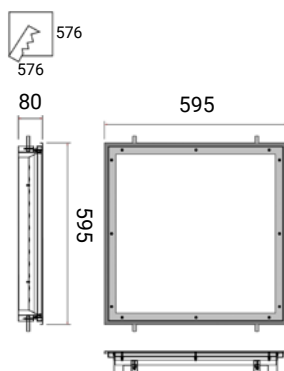

ESTANDAR/STANDARD



5 AÑOS
5 YEARS



220-240V
50-60Hz



IP 65



IK 04



CLASE I
CLASS I



50.000h
L80B10



-20°
+40°



CRI 80



3000K
4000K
6000K



1-10V
DALI



1h
3h

CONFIGURACION ONLINE ONLINE CONFIGURATION



Código Code	Referencia Reference	Kg Kg	Potencia Power	Lúmenes Lumens	Eficiencia Efficiency	CCT (K) CCT (K)
P60224KCB	P/OPAL/L-IP65-44W 5000Lm/830-840-860 (596x596)	9,2	44W	5000	113 lm/W	3000, 4000, 6000
P60225KCB	P/OPAL/L-IP65-50W 5650Lm/830-840-860 (596x596)	9,2	50W	5650	113 lm/W	3000, 4000, 6000
P60227KCB	P/OPAL/L-IP65-55W 6250Lm/830-840-860 (596x596)	9,2	55W	6250	113 lm/W	3000, 4000, 6000
P60314KCB	P/OPAL/L-IP65-44W 5000Lm/830-840-860 (1196x296)	9,2	44W	5000	113 lm/W	3000, 4000, 6000
P60315KCB	P/OPAL/L-IP65-50W 5650Lm/830-840-860 (1196x296)	9,2	50W	5650	113 lm/W	3000, 4000, 6000
P60317KCB	P/OPAL/L-IP65-55W 6250Lm/830-840-860 (1196x296)	9,2	55W	6250	113 lm/W	3000, 4000, 6000

ACCESORIOS DISPONIBLES/AVAILABLE ACCESSORIES

REGULACION/DIMMING 1-10V | DALI KIT DE EMERGENCIA/EMERGENCY KIT 1h | 3h ACCESORIO PARA EMPOTRAR/ACCESSORY FOR RECESS DIFUSOR MICROPRISMÁTICO/MICROPRISMATIC DIFFUSER
REGULADOR DE LUZ + DETECTOR DE PRESENCIA (RLP)/AMBIENT LIGHT + PRESENCE SENSOR (RLP) DETECTOR DE PRESENCIA (SLP)/PRESENCE DETECTOR (SLP)