

MAX UNO

ES

Montaje: Adosado/Suspendido.
Fuente de luz: Módulos lineales LED SMD.
 Temperatura de color 5000K.
 Disponible, 4000K.

Sistema óptico: Borosilicato templado.

Distribución luminosa: Directa.

Equipo eléctrico: Equipo de control electrónico. PF>0,95. Disponible, con emergencia integrada.
 Temperatura ambiente: (-20°C /+60°C) = T5, (-20°C/+55°C) = T6 (-20°C/+30°C) = T6 Emergencia.

Materiales: Cuerpo: Fundición de aluminio. Difusor: Vidrio de Borosilicato templado. Incluido: Prensa ATEX: M20 para cable no armado.

Acabado: Color negro.



EN

Mounting: Surface/Suspended.
Light source: LED linear modules SMD.
 Temperature color 5000K.
 Available, 4000K.

Optical system: Borosilicate glass.

Light distribution: Direct.


Electrical equipment: Electronic control gear. PF>0,95. Available, with integrated emergency.
 Ambient temperature: (-20°C /+60°C) = T5, (-20°C/+55°C) = T6 (-20°C/+30°C) = T6 Emergencia.

Materials: Body: Foundry aluminum. Diffuser: Tempered borosilicate glass. Included: ATEX non armored cable gland M20.

Surface finish: Black color.




ESTANDAR | STANDARD

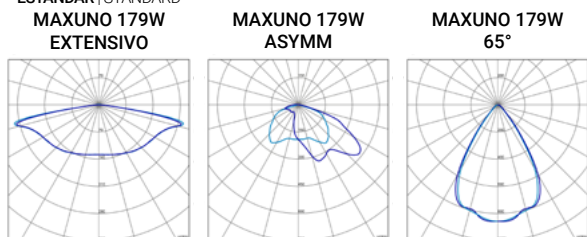

CERTIFICADO ATEX/ATEX CERTIFICATE


DISPONIBLE CON OPCION DE EMERGENCIA INTEGRADA
 WITH INTEGRATED EMERGENCY AVAILABLE

ZONAS	ZONA 1, 2, 21, 22.	—
Protección contra explosiones de gas Gas explosion protection	ATEX: II 2G Ex db IIB T6... T5 Gb	IECEX: Ex db IIB T6... T5 Gb
Protección contra explosiones de polvo Dust explosion protection	ATEX: II 2D Ex tb IIIC 85°C Db	IECEX: Ex tb IIIC 85°C Db

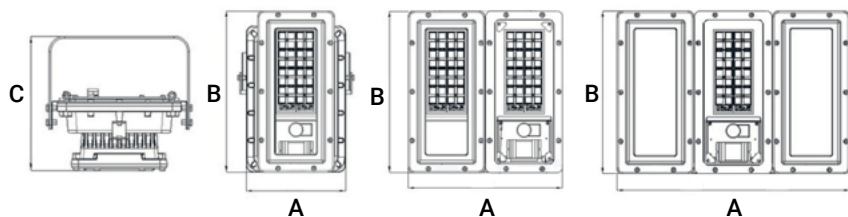

MODELO	A	B	C
MAXUNO 60W	626	455	282
MAXUNO 120W	1235	455	442
MAXUNO 179W	1537	455	664

ESTANDAR/STANDARD



DISPONIBLE/AVAILABLE



CONFIGURACION ONLINE
 ONLINE CONFIGURATION



Código Code	Referencia Reference	Potencia Power	Lúmenes Lumens	Eficiencia Efficiency	CCT (K) CCT (K)
AIRPA605A	MAXUNO 60W 8878lm/5000K EXTENSIVO 150°	60W	8878	148 lm/W	5000
AIRPA705A	MAXUNO 120W 17755lm/5000K EXTENSIVO 150°	120W	17755	148 lm/W	5000
AIRPA805A	MAXUNO 179W 26633lm/5000K EXTENSIVO 150°	179W	26633	149 lm/W	5000

ACCESORIOS DISPONIBLES/AVAILABLE ACCESSORIES

REGULACION/DIMING DALI T.COLOR 4000K KIT DE EMERGENCIA/EMERGENCY KIT 3h
 SET DE SUSPENSION DE CABLE DE ACERO INOX/STAINLESS STEEL SUSPENSION CABLE PRENSAESTOPA CABLE ARMADO/ ARMORED CABLE GLAND