

WATEX

ES

Montaje: Adosado/Suspendido.
Fuente de luz: Módulos lineales LED SMD.
 Temperatura de color 4000K.
 Disponible, 3000K, 6000K.
Sistema óptico: Difusor opal.
Distribución luminosa: Directa.
Equipo eléctrico: Equipo de control electrónico. PF>0,95.
 Bajo consulta, regulable DALI y/o Kit de emergencia (1-3 h).
Materiales: Cuerpo: Policarbonato. Difusor: Policarbonato.
 Clips: Acero inoxidable.
 Prensaestopa M20 para cable no armado (7-12mm) incluido.
Acabado: Color gris.




EN


Mounting: Surface/Suspended.
Light source: LED linear modules SMD.
 Temperature color 4000K.
 Available, 3000K, 6000K.
Optical system: Opal diffuser.
Light distribution: Direct.
Electrical equipment: Electronic control gear. PF>0,95. Under request, dimmable DALI and/or emergency kit (1-3 h).
Materials: Body: Polycarbonate. Diffuser: Polycarbonate.
 Clips: Stainless steel.
 Non armored M20 cable gland (7-12mm) included.
Surface finish: Grey color.



WATEX IP66-1500-80W


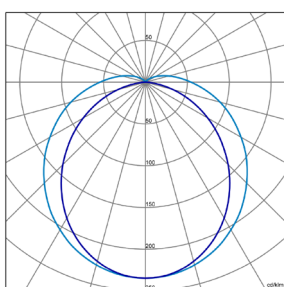


CERTIFICADO ATEX
ATEX CERTIFICATE

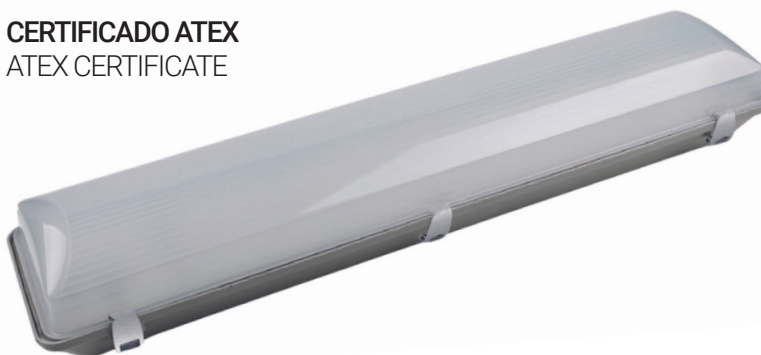

ZONAS	ZONA 2, 21, 22.	—
Protección contra explosiones de gas Gas explosion protection	ATEX: II 3G Ex ec IIC T5 Gc	IECEX: Ex ec IIC T5 Gc
Protección contra explosiones de polvo Dust explosion protection	ATEX: II 2D Ex tb IIIC 85°C Db	IECEX: Ex tb IIIC 85°C Db

MONTAJE/MOUNTING

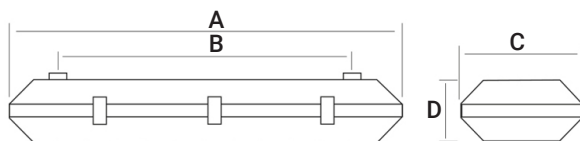

MODELO	A	B	C	D
WATEX 600	664	260	100	105
WATEX 1200	1274	870	100	105
WATEX 1500	1575	650	100	105
WATEX MAX 600	664	260	160	110
WATEX MAX 1200	1274	870	160	110
WATEX MAX 1500	1575	650	160	110

ESTANDAR/STANDARD



DISPONIBLE/AVAILABLE



CONFIGURACION ONLINE ONLINE CONFIGURATION



Código Code	Referencia Reference	Potencia Power	Lúmenes Lumens	Eficiencia Efficiency	CCT (K) CCT (K)
AIREW124C	WATEX IP66-600-17W 2885lm/4000K	17W	2885	170 lm/W	4000
AIREW224C	WATEX IP66-1200-40W 6954lm/4000K	40W	6954	174 lm/W	4000
AIREW324C	WATEX IP66-1500-65W 10990lm/4000K ec	65W	10990	170 lm/W	4000
AIREY124C	WATEX MAX IP66-600-32W 5770lm/4000K ec	32W	5770	180 lm/W	4000
AIREY224C	WATEX MAX IP66-1200-64W 11541lm/4000K	64W	11541	180 lm/W	4000
AIREY324C	WATEX MAX IP66-1500-80W 14426lm/4000K ec	80W	14426	180 lm/W	4000

ACCESORIOS DISPONIBLES/AVAILABLE ACCESSORIES

REGULACION/DIMMING DALI T.COLOR 3000K, 6000K KIT DE EMERGENCIA/EMERGENCY KIT 1h | 3h SET DE SUSPENSION/SUSPENSION SET FIJACION A BACULO/POLE FIXING
 PRENSAESTOPA CABLE ARMADO/ ARMORED CABLE GLAND ELECTRIFICACION 5 POLOS/ELECTRIFICATION 5 PINES ELECTRIFICACION LC 3/5 POLOS/ELECTRIFICATION LC 3/5 PINES
 ELECTRIFICACION LC 3/5 POLOS PARA CABLE ARMADO/ELECTRIFICATION LC 3/5 PINES FOR ARMORED CABLE