

ATEX LED MAX

ES

Montaje: Adosado/Suspendido.

Fuente de luz: Módulos lineales LED SMD.

Temperatura de color 5000K.

Disponible, 4000K.

Sistema óptico: Borosilicato templado.

Distribución luminosa: Directa.

Equipo eléctrico: Equipo de control electrónico. PF>0,95.

Materiales: Cuerpo: Fundición de aluminio. Difusor: Vidrio de Borosilicato templado. Incluidos: Prensa ATEX: M25 para cable no armado. Tapón ATEX antideflagrante M25.

Acabado: Color negro.



EN

Mounting: Surface/Suspended.

Light source: LED linear modules SMD.

Temperature color 5000K.

Available, 4000K.

Optical system: Borosilicate glass.

Light distribution: Direct.


Electrical equipment: Electronic control gear. PF>0,95.

Materials: Body: Foundry aluminum. Diffuser: Tempered borosilicate glass. included: ATEX non armored cable gland M25. ATEX Plug M25.


Surface finish: Black color.




ATEX LED MAX 190W
EXTENSIVO
ESTANDAR | STANDARD




ATEX LED MAX 190W
ASYMM




ATEX LED MAX 190W
65°



CERTIFICADO ATEX/ATEX CERTIFICATE

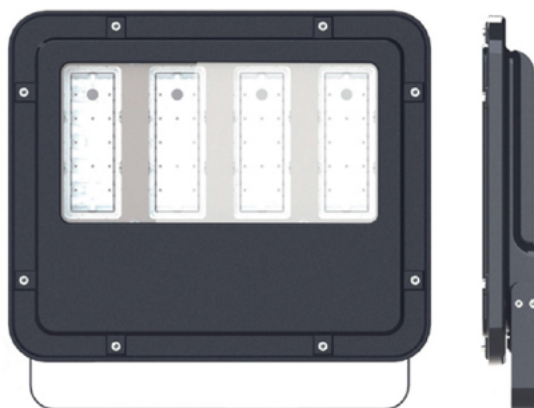

ZONAS	ZONA 2, 21, 22.	—
Protección contra explosiones de gas Gas explosion protection	ATEX: II 3G Ex ec IIC T4 Gc (todas las versiones/all versions) ATEX: II 3G Ex ec IIC T5 Gc (hasta 98W/up to 98W)	IECEX: Ex ec IIC T4 Gc (todas las versiones/all versions) IECEX: Ex ec IIC T5 Gc (hasta 98W/up to 98W)
Protección contra explosiones de polvo Dust explosion protection	ATEX: II 2D Ex tb IIIC 85°C Db	IECEX: Ex tb IIIC 85°C Db

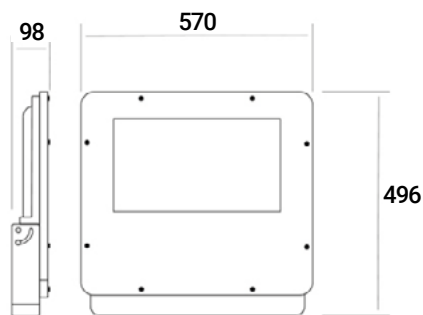

ESTANDAR/STANDARD



5 AÑOS
5 YEARS



220-240V
50-60Hz



IP 66



IK 08



CLASE I
CLASS I



100.000h
L80B10



-20°
+45°



CRI 80



ATEX
IECEX



TAPON
PLUG



DALI



4000K



EMERGENCY
1h
3h

CONFIGURACION ONLINE ONLINE CONFIGURATION



Código Code	Referencia Reference	Potencia Power	Lúmenes Lumens	Eficiencia Efficiency	CCT (K) CCT (K)
AIRPA105A	ATEX LED MAX 50W 8164lm/5000K EXTENSIVO	50W	8164	163 lm/W	5000
AIRPA205A	ATEX LED MAX 98W 16368lm/5000K EXTENSIVO	98W	16368	167 lm/W	5000
AIRPA305A	ATEX LED MAX 148W 24552lm/5000K EXTENSIVO	148W	24552	166 lm/W	5000
AIRPA405A	ATEX LED MAX 190W 32726lm/5000K EXTENSIVO	190W	32726	172 lm/W	5000

ACCESORIOS DISPONIBLES/AVAILABLE ACCESSORIES

T.COLOR 5000K SET DE SUSPENSION DE CABLE DE ACERO INOX/STAINLESS STEEL SUSPENSION CABLE PRENSAESTOPA CABLE ARMADO/ ARMORED CABLE GLAND PROTECCION MARINA/MARINE ENVIRONMENT PROTECTION