

## PYROS

### ES

**Montaje:** Adosado/Suspendido.

**Fuente de luz:** Módulos lineales LED SMD.

Temperatura de color 4000K.

Disponibles, 3000K, 5000K, 6500K.

**Sistema óptico:** Difusor transparente.

**Distribución luminosa:** Directa.

**Equipo eléctrico:** Equipo de control electrónico. PF>0,95.

Bajo consulta, regulable DALI y/o Kit de emergencia (1-3 h).

**Materiales:** Cuerpo: Policarbonato. Tapas: Aluminio. Incluidos: Prensa ATEX: M25 para cable no armado (9-16 mm). Tapón ATEX antideflagrante M25. Bridas: Acero cincado.

**Acabado:** Color gris.



### EN

**Mounting:** Surface/Suspended.

**Light source:** LED linear modules SMD.

Temperature color 4000K.

Available, 3000K, 5000K, 6500K.

**Optical system:** Transparent diffuser.

**Light distribution:** Direct.



**Electrical equipment:** Electronic control gear. PF>0,95. Under request, dimmable DALI and/or emergency kit (1-3 h).

**Materials:** Body: Polycarbonate. Caps: Aluminium. Included: ATEX non armored cable gland M25 (9-16 mm). ATEX Plug M25. Zinc plated steel clamps.

**Surface finish:** Grey color.




PYROS IP66-1500-65W

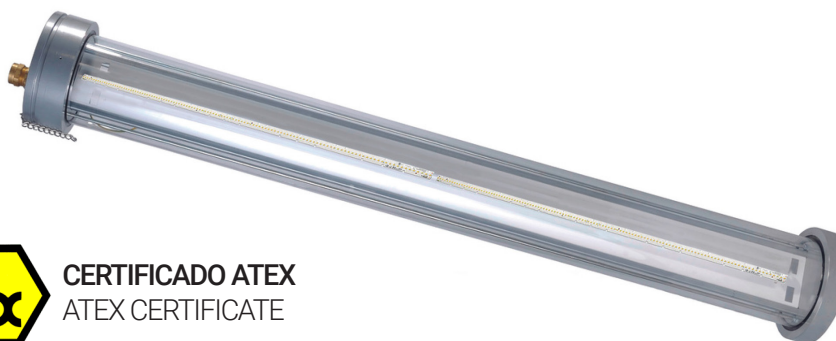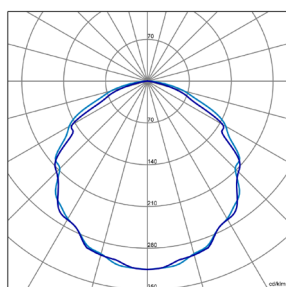

**CERTIFICADO ATEX**  
ATEX CERTIFICATE

ZONAS	ZONA 1, 2, 21, 22.	—
Protección contra explosiones de gas Gas explosion protection	ATEX: II 2 G Ex db IIB+H2 T6 Gb	IECEX: Ex db IIB+H2 T6 Gb
Protección contra explosiones de polvo Dust explosion protection	ATEX: II 2 D Ex tb IIIC T85°C Db	IECEX: Ex tb IIIC T85°C Db

MONTAJE/MOUNTING

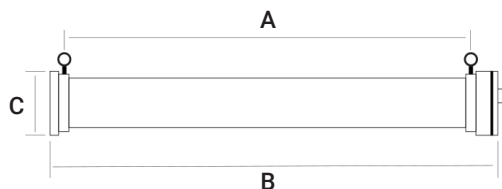

MODELO	A	B	C
PYROS 600 MM	626	748	190
PYROS 1200 MM	1235	1357	190
PYROS 1500 MM	1537	1659	190
PYROS MAX 600 MM	626	748	190
PYROS MAX 1200 MM	1235	1357	190
PYROS MAX 1500 MM	1537	1659	190

#### ESTANDAR/STANDARD



5 AÑOS  
5 YEARS



220-240V  
50-60Hz



IP 66



IK 10



CLASE I  
CLASS I



100.000h  
L80B10



-20°  
+50°



CRI 80



ATEX  
IECEX



TAPON  
PLUG



BRIDAS  
CLAMPS



DALI



3000K  
5000K  
6500K



EMERGENCY  
1h  
3h

#### CONFIGURACION ONLINE ONLINE CONFIGURATION



Código Code	Referencia Reference	Potencia Power	Lúmenes Lumens	Eficiencia Efficiency	CCT (K) CCT (K)
AIRPY124	PYROS IP66-600-17W 2885lm/4000K	17W	2885	170 lm/W	4000
AIRPY224	PYROS IP66-1200-40W 6954lm/4000K	40W	6954	173 lm/W	4000
AIRPY324	PYROS IP66-1500-65W 10990lm/4000K	65W	10990	170 lm/W	4000
AIRPY134	PYROS MAX IP66-600-26W 5043lm/4000K	26W	5043	194 lm/W	4000
AIRPY234	PYROS MAX IP66-1200-52W 10086lm/4000K	52W	10086	194 lm/W	4000
AIRPY324	PYROS MAX IP66-1500-65W 12608lm/4000K	65W	12608	194 lm/W	4000

#### ACCESORIOS DISPONIBLES/AVAILABLE ACCESSORIES

REGULACION/DIMMING DALI T.COLOR 3000K, 5000K, 6000K KIT DE EMERGENCIA/EMERGENCY KIT 1h | 3h FIJACION A BACULO/POLE FIXING  
PRENSAESTOPA CABLE ARMADO/ARMORED CABLE GLAND ELECTRIFICACION 3/5 POLOS/ELECTRIFICATION 3/5 PINES  
KIT DE MONTAJE/MOUNTING KIT TORNILLOS ANTI-PERDIDA PARA MONTAJE AEREO/ANTI-LOSS SCREWS FOR AERIAL MOUNTING